

DS-2DE3304W-DE

3MP Network Mini PTZ Dome Camera



This Micro-designed 3" PTZ Mini Dome Camera shows the easiest installation, adjustment and maintenance that you have ever seen. It is a fantastic and practical camera for outdoor. In addition, DS-2DE3304W-DE support 4X zoom technology, and PoE&12VDC power supply. Embedded with 1/2.8" progressive scan CMOS chip makes DWDR and 3MP real-time resolution possible. With the pan/tilt and 4X zoom Day/Night lens, the camera offers more details in the outdoor environments.

Hikvision DS-2DE3304W-DE Mini PTZ Dome Cameras also features a wide range of functions, including intrusion detection, line crossing detection, motion detection and audio exception, benefitting users with great improvement on security efficiency, more importantly, with key events / objects being recorded for further forensic needs.

Key Features

- 1/2.8" Progressive Scan CMOS
- 2048 x 1536
- 4X Optical Zoom
- DWDR
- Support IP67/IK10
- PoE(802.3af)
- Support RS485
- Support plug & play



Basic function **Function Description**

- High performance CMOS, up to 2048 x 1536@30fps resolution
- $\pm 0.1^\circ$ Preset Accuracy
- ONVIF(Open Network Video Interface Forum), CGI(Common Gateway Interface), ISAPI, to ensure greater interoperability between different platforms and compatibility
- 3D intelligent positioning function
- Power-off memory function: restore PTZ & Lens status after reboot
- Support RS485
- Support IP67/IK10
- PoE(802.3af)

Functions

- Detections: intrusion detection, line crossing detection, audio exception detection, motion detection
- Recording: edge recording, support smart search in smart NVR
- Support low bit rate, ROI

Camera function

- Auto iris, auto focus, auto white balance, backlight compensation and auto day & night switch
- Min. Illumination: 0.05Lux@(F1.6,AGC ON)(Color), 0.01Lux@(F1.6,AGC ON)(B/W)
- Support 8 privacy masks

PTZ functions

- 0-350° pan range and 0°-90° tilt range
- 0.1°-60°/s Manual Pan Speed and 0.1°-50°/s Manual Tilt Speed
- 300 presets programmable;
- 8 patrols, up to 32 presets per patrol

Network function

- Built-in Web server
- Micro SD card local storage, up to 128GB
- Support up to 8 NAS storage; Transmit the videos from SD card to the NAS after network resumed
- HTTPS encryption and IEEE 802.1x port-based network access control
- Support three streams; H.265+/H.265/H.264+/H.264/MJPEG video compression; Basic and advanced video configuration; Real time video at 2048 x 1536
- Multiple network protocols supported: IPv4/IPv6, TCP/IP, HTTP, DHCP, DNS, DDNS, RTP, RTSP, PPPoE, SMTP, NTP, UPnP, SNMP, FTP, 802.1x, QoS, HTTPS
- 1 audio input and 1 audio output
- 1 alarm input and 1 alarm output, alarm linkage support preset, recording, relay output, upload center, etc.

Specifications

Model	DS-2DE3304W-DE
Camera Module	
Image Sensor	1/2.8" Progressive Scan CMOS
Min. Illumination	F1.6, AGC On : Color : 0.05 lux, B/W : 0.01 lux
Max. Image Resolution	2048(H) × 1536(V)
Focal Length	2.8~12mm, 4x
Digital Zoom	16X
Zoom Speed	Approx.1s(Wide~Tele)
Angle of View	105~33.5 degree (Wide~Tele)
Aperture Range	F1.6 ~F2.7
Focus Mode	Auto / Semiautomatic / Manual
DWDR	Yes
Shutter Time	1/1~1/10,000s
AGC	Auto / Manual
White Balance	Auto / Manual /ATW/Indoor/Outdoor/Daylight lamp/Sodium lamp
Day & Night	IR Cut Filter
Privacy Mask	8 privacy masks programmable
Enhancement	3D DNR, HLC/BLC
Pan and Tilt	
Range	Pan: 0~350°; Tilt: 0°~90°
Speed	Pan Manual Speed: 0.1°~60°/s Tilt Manual Speed: 0.1°~50°/s
Number of Preset	300
Patrol	8 patrols, up to 32 presets per patrol
Park Action	Preset/Patrol
Scheduled Task	Preset / Reboot / Patrol /Self test / Aux output
Features	
Detection	Intrusion detection, line crossing detection, audio exception detection, motion detection
ROI encoding	Support 4 areas with adjustable levels
Alarm	
Alarm I/O	1/1
Alarm Trigger	Tampering alarm, Network disconnect, IP address conflict, Storage exception
Alarm Action	Preset, Recording, Relay output, Upload center, Upload FTP, Email linkage

Input/Output	
Audio Input	1 audio input (Mic/Line in), 2~2.4V[p-p]; output impedance: 1K Ω , \pm 10%
Audio Output	1 output, Line level, impedance: 600 Ω
Network	
Ethernet	10Base-T / 100Base-TX, RJ45 connector
Stream	Support three streams
Main Stream	50Hz:25fps (2048 \times 1536,1920 \times 1080,1280 \times 960,1280 \times 720), 50fps (1280 \times 960,1280 \times 720) ; 60Hz: 30fps(2048 \times 1536,1920 \times 1080,1280 \times 960,1280 \times 720), 60fps (1280 \times 960,1280 \times 720)
Sub Stream	50Hz: 25fps (704 \times 576), 25fps (640 \times 480), 25fps (320 \times 288) 60Hz: 30fps (704 \times 480), 30fps (640 \times 480), 30fps (320 \times 240)
Third Stream	50Hz: 25fps (1920 \times 1080, 1280 \times 720, 704 \times 576, 640 \times 480, 320 \times 288) 60Hz: 30fps (1920 \times 1080, 1280 \times 720, 704 \times 480, 640 \times 480, 320 \times 240)
Image Compression	H.265+/H.265/H.264+/H.264/MJPEG
Audio Compression	G.711ulaw/G.711alaw/G.726/MP2L2/G.722/PCM
Protocols	IPv4/IPv6, HTTP, HTTPS, 802.1X, QoS, FTP, SMTP, UPnP, SNMP, DNS, DDNS, NTP, RTSP, RTP, TCP, UDP,IGMP, ICMP, DHCP, PPPoE
Simultaneous Live View	Up to 20 users
Mini SD Memory Card	Support up to 128GB Micro SD/SDHC/SDXC card. Support Edge recording
User/Host Level	Up to 32 users,3 Levels: Administrator, Operator and User
Security Measures	User authentication (ID and PW); Host authentication (MAC address); IP address filtering
System Integration	
Language (Web Browser Access)	32 languages. English, Russian, Estonian, Bulgarian, Hungarian, Greek, German, Italian, Czech, Slovak, French, Polish, Dutch, Portuguese, Spanish, Romanian, Danish, Swedish, Norwegian, Finnish, Croatian, Slovenian, Serbian, Turkish, Korean, Traditional Chinese, Thai, Vietnamese, Japanese, Latvian, Lithuanian, Portuguese (Brazil)
API	ONVIF (Profile S, Profile G, Profile T), ISAPI, SDK
Web Browser	IE 8 to 11, Chrome 31.0+, Firefox 30.0+, Edge 16.16299+
Power	POE (802.3af, class3)&12 VDC, Max. 8W
Working Temperature	-30 $^{\circ}$ C ~ 65 $^{\circ}$ C (-22 $^{\circ}$ F ~ 149 $^{\circ}$ F)
Humidity	90% or less
Protection Level	IP67, IK10, 4,000V lightning protection, surge protection and voltage transient protection
Certification	FCC, CE, UL, RoHS, IEC/EN 61000, IEC/EN 55022, IEC/EN 55024, IEC /EN60950-1
Dimensions	Φ 140.7 \times 107.2mm
Weight (approx.)	950g
Mount Option	Wall mount: DS-1273ZJ –PT6; In-ceiling Mount: 1227ZJ-PT6; Junction Box: DS-1280ZJ –PT6

DORI

The DORI (detect, observe, recognize, identify) distance gives the general idea of the camera ability to distinguish persons or objects within its field of view.


It is calculated based on the camera sensor specification and the criteria given by EN 62676-4: 2015.

DORI	Detect	Observe	Recognize	Identify
Definition	25 px/m	63 px/m	125 px/m	250 px/m
Distance (Tele)	144.0 m (472.4 ft)	57.1 m (187.5 ft)	28.8 m (94.5 ft)	14.4 m (47.2 ft)

Order Models

DS-2DE3304W-DE, POE(802.3af, class3)&12 VDC

Dimensions

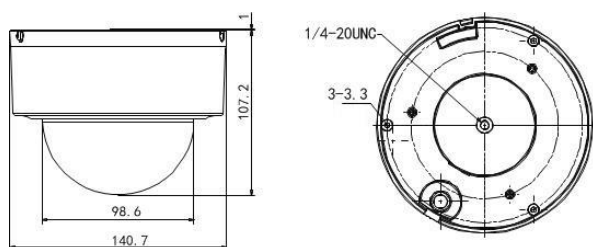

Accessory

Optional:



1227ZJ-PT6
In-ceiling Mount



DS-1273-ZJ-PT6
Wall Mount



DS-1280ZJ-PT6
Junction box



DS-1275ZJ-SUS
Vertical pole mount



DS-1276ZJ-SUS
Corner mount



ADS-12FG-12N 12012EPG(EU)
DSA-12PFT-12FUS120100(USA)
DSA-12PFG-12 FUK 120100(UK)
DSA-12PFT-12 FUS 120100(JP)
Power adapter



LAS60-57CN-RJ45
Hi-PoE midspan



DS-1100KI
Network Keyboard



DS-1005KI
USB Joy-stick



Distributed by

**HIKVISION®****Headquarters**

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-8599-4233
salesau@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Canada
T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Thailand
T +662-275-9949
sales.thailand@hikvision.com

Hikvision Europe
T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Turkey
T +90 (216)521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia
T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland
T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa
Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-727-9730667
nikia.panfilov@hikvision.ru

Hikvision Vietnam
T +84-974270888
sales.vt@hikvision.com

Hikvision UAE
T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent
T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong
T +852-2151-1761
info.hk@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Korea
T +82-(0)31-731-8817
sales.korea@hikvision.com

Hikvision Poland
T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia
T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com