

## DS-7700NI-Q4 SERIES NVR



### Features and Functions

#### HD Input

- H.265+/H.265/H.264/H.264+ video formats
- Connectable to the third-party network cameras
- Up to 8/16/32-ch IP cameras can be connected for DS-7708/7716/7732NI-Q4
- Recording at up to 8 MP resolution
- Live view, storage, and playback of the connected camera at up to 8 MP resolution

#### HD Output

- HDMI/VGA independent output (DS-7708NI-Q4 and DS-7716NI-Q4)
- HDMI and VGA simultaneous outputs (DS-7732NI-Q4)
- HDMI Video output at up to 4K (3840 × 2160) resolution (DS-7708NI-Q4 and DS-7716NI-Q4)

#### HD Storage

- 4 SATA interfaces connectable for recording and backup
- H.265+ compression effectively reduces the storage space and costs by up to 75%

#### HD Transmission

- 2 self-adaptive 10/100/1000 Mbps network interfaces

#### Various Applications


- Centralized management of IP cameras, including configuration, information import/export, real-time information display, two-way audio, upgrade, etc
- Connectable to smart IP cameras from Hikvision and the recording, playing back, and backing up of VCA alarms can be realized
- VCA detection alarm is supported
- Instant playback for assigned channel during multi-channel display mode
- Smart search for the selected area in the video, and smart playback to improve the playback efficiency
- Hik-Connect for easy network management



## Specifications

Model		DS-7708NI-Q4	DS-7716NI-Q4	DS-7732NI-Q4
Video/Audio input	IP video input	8-ch	16-ch	32-ch
		Up to 8 MP resolution		
	Two-way audio	1-ch, RCA (2.0 Vp-p, 1 k Ω)		
Network	Incoming bandwidth	80 Mbps	160 Mbps	200 Mbps
	Outgoing bandwidth	80 Mbps		128 Mbps
Video/Audio output	Recording resolution	8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF		
	HDMI output resolution	1-ch, 4K (3840 × 2160)/30Hz, 1920 × 1080p/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz;		1-ch, 1920 × 1080/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz;
	VGA output resolution	1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz;		1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz
	Audio output	1-ch, RCA (Linear, 1 k Ω)		
Decoding	Decoding format	H.265/H.265+/H.264/H.264+/MPEG4		
	Live view / Playback resolution	8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA /720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF		
	Synchronous playback	8-ch	16-ch	
	Capability	1-ch @ 8 MP (30 fps) / 4-ch @ 1080p (30 fps)		
Network management	Network protocols	TCP/IP, DHCP, Hik-Connect, DNS, DDNS, NTP, SADP, SMTP, NFS, iSCSI, UPnP™, HTTPS		
Hard disk	SATA	4, SATA interface		
	Capacity	Up to 6 TB capacity for each disk		
External interface	Network interface	2, RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface		
	Serial interface	1 RS-485 (half-duplex), 1 RS-232		
	USB interface	Front panel: 2 × USB 2.0; Rear panel: 1 × USB 2.0		
	Alarm in/out	16/4 (16/8 optional)		
General	Power supply	100 to 240 VAC		
	Total power	≤ 80 W		
	Consumption (without hard disk)	≤ 15 W		
	Working temperature	-10 °C to 55 °C (14 °F to 131 °F)		
	Working humidity	10 % to 90 %		
	Dimensions (W × D × H)	440 × 393 × 75 mm (17.3" × 15.5" × 3.0")		
	Weight (without hard disk)	≤ 5 kg (11 lb)		

## Physical Interfaces

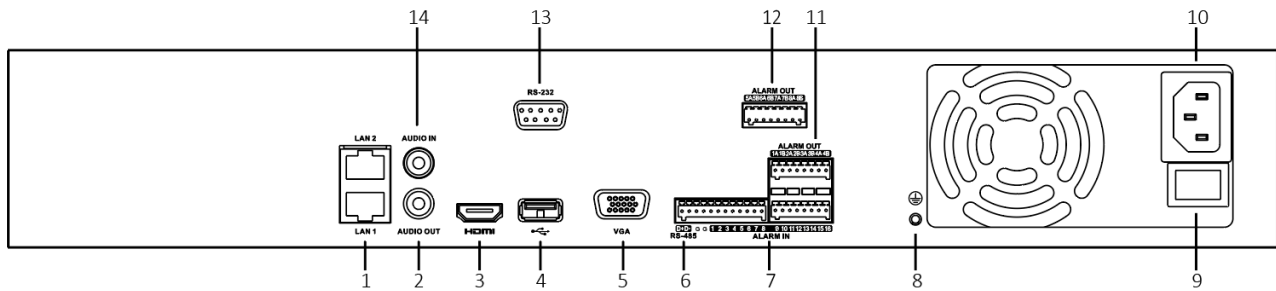

Index	Description	Index	Description
1	LAN Network Interface	8	GND
2	AUDIO OUT	9	Power Switch
3	HDMI Interface	10	100 to 240 VAC Power Supply
4	USB 2.0 Interface	11	Alarm Out
5	VGA Interface	12	Alarm Out (Optional)
6	RS-485 Serial Interface	13	RS-232 Serial Interface
7	Alarm In	14	AUDIO IN

## Available Models

DS-7708NI-Q4, DS-7716NI-Q4, DS-7732NI-Q4

Distributed by



## HIKVISION®

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Africa**  
T +27 (10) 0351172  
sale.africa@hikvision.com

**Hikvision Europe**  
T +31-23-55-42-770  
info.eu@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-450  
info.fr@hikvision.com

**Hikvision Oceania**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision Hong Kong**  
T +852-2151-1761

**Hikvision Middle East**  
T +971-4-8816086  
salesme@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Canada**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
poland@hikvision.com

**Hikvision Korea**  
T +82-31-731-8841  
sales.korea@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision UK**  
T +01628-902140  
support.uk@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
Latam.support@hikvision.com